

### Seatpost Instruction:

The following instructions should be read completely before installation of the seatpost. If you have any questions regarding installation or service of this products, please contact your local dealer, we recommend that a professional bicycle mechanic install and service this product.



Please notice: The only piece of the assembly that could cause damage by being assembled improperly is the spherical washer. The spherical seat in the washer must face the spherical seat underneath the head of the bolt.

Step 1. Use 4mm hex tool loosening seatpost head of clamp after put The saddle rails to right position after tightening to 5 N.m.

Step 2. Use 5 mm hex tool loosening the M10 scandium bolt lets saddle to exactly angle after tightening to 12.N.m.

Step 3. Please must to recheck all of parts put on right position and tightening after assembly.

### Assembly draw info:

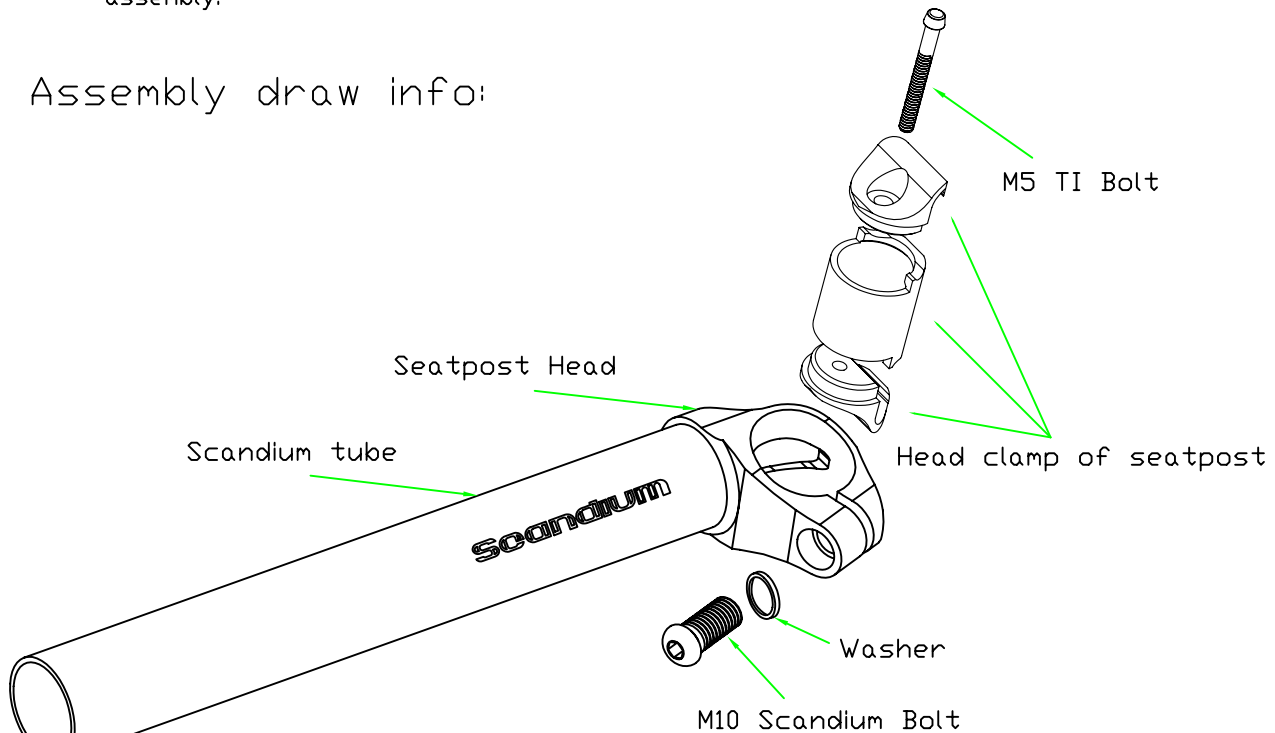

NO 13,L CHU WEI, CHIN LING, HSIU SHUI,  
CHANGHUA, TAIWAN,R.O.C  
TEL :886-4-7684363 FAX :886-4-7684373  
E-mail :kcnc@kcnc.com.tw  
http://www.kcnc.com.tw  
www.kenbikes.com.tw

### Warranty

If you feel a warranty claim, would like to learn more about our warranty policy, or have further questions or comments please visit our web site at [www.kcnc.com.tw](http://www.kcnc.com.tw)  
[www.kenbikes.com.tw](http://www.kenbikes.com.tw)